




Smart-L

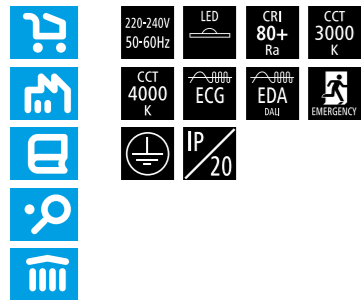

- Mounting** Suspended or ceiling surfaced
– determined for continuous installation (MDS)
- Light source** LED
- Colour tolerance** 3 SDCM
- Optical system** Medium lenses (LME)
Wide lenses (LWE)
Double asymmetric lenses (LA2)
Corridor lenses (LCO)
- Wiring** Electronic control gear FIX/DALI (ECG/EDA)
Emergency unit variant (3H, ECG)
- Materials** Housing: sheet steel
Lenses: PMMA
- Surface finish** Housing: white RAL 9003 (W03)
- Accessories** Components for PRESTIGE SYSTEM
Anti-glare grid (LME/LWE)
- Service lifetime** 50,000 hours/L80/B10 (ta 25°C)
- Ambient temperature** From -20 °C to +35 °C (from +5°C with EM unit)



TYPE	NET LUMEN OUTPUT (at Ta = 25 °C) (lm)	POWER CONSUMPTION (W)	SYSTEM EFFICACY (lm/W)	COLOUR RENDERING INDEX CRI (Ra)	CORRELATED COLOUR TEMPERATURE CCT (K)	BEAM ANGLE (C0-180, C90-270)	EMERGENCY UNIT 3H (lm)	WEIGHT (kg)	ORDER CODE		
									ECG	EDA	ECG + EM
SMART-L LME	5600	38	147	80+	3000	56°	410	2.8	309072	309073	309005
SMART-L LME	5750	38	151	80+	4000	56°	430	2.8	309082	309083	309006
SMART-L LME	8150	58	141	80+	3000	56°	410	2.8	309074	309075	309017
SMART-L LME	8400	58	145	80+	4000	56°	430	2.8	309078	309079	309018
SMART-L LME	10,050	77	131	80+	3000	56°	410	2.8	309080	309081	309029
SMART-L LME	10,350	77	134	80+	4000	56°	430	2.8	309076	309077	309030
SMART-L LWE	5550	38	146	80+	3000	93°, 91°	410	2.8	309088	309089	309005
SMART-L LWE	5700	38	150	80+	4000	93°, 91°	430	2.8	309086	309087	309006
SMART-L LWE	8100	58	140	80+	3000	93°, 91°	410	2.8	309094	309095	309017
SMART-L LWE	8350	58	144	80+	4000	93°, 91°	430	2.8	309090	309091	309018
SMART-L LWE	10,000	77	130	80+	3000	93°, 91°	410	2.8	309092	309093	309025
SMART-L LWE	10,300	77	134	80+	4000	93°, 91°	430	2.8	309084	309085	309026
SMART-L LA2	5600	38	147	80+	3000	74°, 134°	410	2.8	309048	309049	309009
SMART-L LA2	5750	38	151	80+	4000	74°, 134°	430	2.8	309058	309059	309010
SMART-L LA2	8150	58	141	80+	3000	74°, 134°	410	2.8	309050	309051	309021
SMART-L LA2	8400	58	145	80+	4000	74°, 134°	430	2.8	309054	309055	309022
SMART-L LA2	10,050	77	131	80+	3000	74°, 134°	410	2.8	309056	309057	309033
SMART-L LA2	10,350	77	134	80+	4000	74°, 134°	430	2.8	309052	309053	309034
SMART-L LCO	5700	38	150	80+	3000	45°, 89°	410	2.8	309060	309061	309037
SMART-L LCO	5900	38	155	80+	4000	45°, 89°	430	2.8	309062	309063	309038
SMART-L LCO	8150	58	141	80+	3000	45°, 89°	410	2.8	309066	309067	309041
SMART-L LCO	8400	58	145	80+	4000	45°, 89°	430	2.8	309068	309069	309042
SMART-L LCO	10,300	77	134	80+	3000	45°, 89°	410	2.8	309064	309065	309045
SMART-L LCO	10,600	77	138	80+	4000	45°, 89°	430	2.8	309070	309071	309096

Luminous flux tolerance +/- 10%.

